
3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Features

- Wide 8V to 40V Input Voltage Range
- Output Adjustable from 1.25V to 35V
- Minimum Drop Out 0.3V
- Fixed 165KHz Switching Frequency
- Maximum 3A Switching Current
- Internal Optimize Power MOSFET
- Excellent line and load regulation
- With output constant current loop
- Built in thermal shutdown function
- Built in current limit function
- Built in input over voltage protection
- Recommend output power less than 13W
- SOP8-EP (Exposed PAD) package

Applications

- Car Charger
- Battery Charger
- LCD Monitor and LCD TV
- Portable instrument power supply
- Telecom / Networking Equipment
- Buck constant current driver
- Monitor LED Backlighting
- General purpose LED lighting

General Description

The CM5201 is a 150KHz fixed frequency PWM buck (step-down) DC/DC converter, capable of driving a 2.5A load with high efficiency, low ripple and excellent line and load regulation. Requiring a minimum number of external components, the regulator is simple to use and include internal frequency compensation and a fixed-frequency oscillator.

The PWM control circuit is able to adjust the duty ratio linearly from 0 to 100%. An enable function, an over current protection function is built inside. An internal compensation block is built in to minimize external component count.



Figure1. Package Type of CM5201

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Pin Configurations

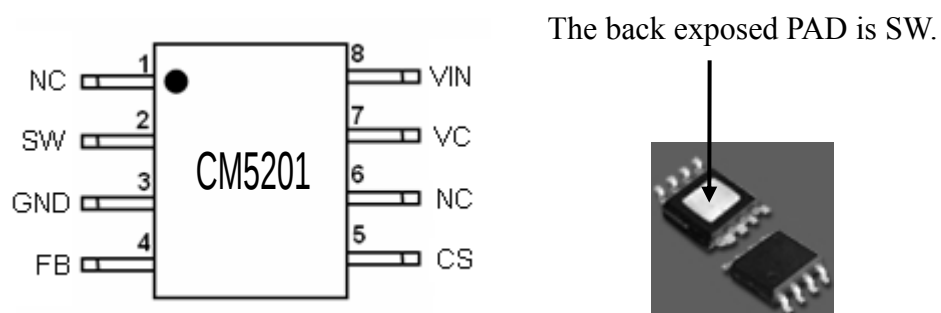


Figure2. Pin Configuration of CM5201 (Top View)

Table 1 Pin Description

Pin Number	Pin Name	Description
1, 6	NC	Not connected.
2	SW	Power Switch Output Pin (SW). Output is the switch node that supplies power to the output. (Note: Connected the back exposed PAD to SW.)
3	GND	Ground Pin.
4	FB	Feedback Pin (FB). Through an external resistor divider network, Feedback senses the output voltage and regulates it. The feedback threshold voltage is 1.25V.
5	CS	Output Current Sense Pin; ($I_{load}=0.11V/R_{cs}$)
7	VC	Internal Voltage Regulator Bypass Capacity. In typical system application, The VC pin connect a 1uF capacity to VIN.
8	VIN	Supply Voltage Input Pin. CM5201 operates from a 8V to 40V DC voltage. Bypass Vin to GND with a suitably large capacitor to eliminate noise on the input.

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Function Block

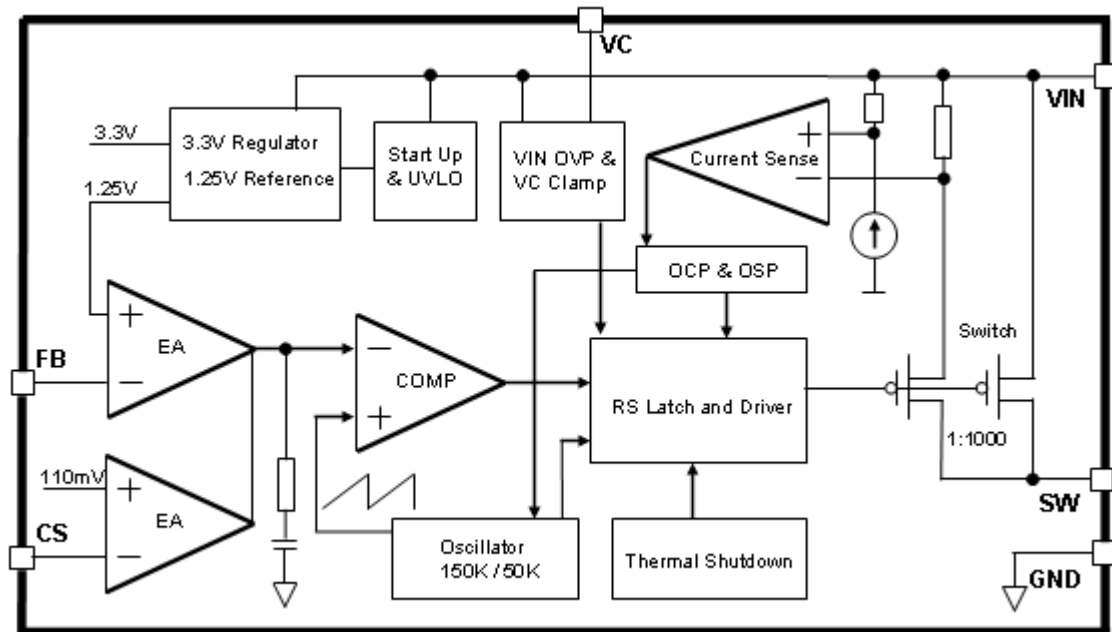


Figure3. Function Block Diagram of CM5201

Typical Application Circuit (Car Charger)

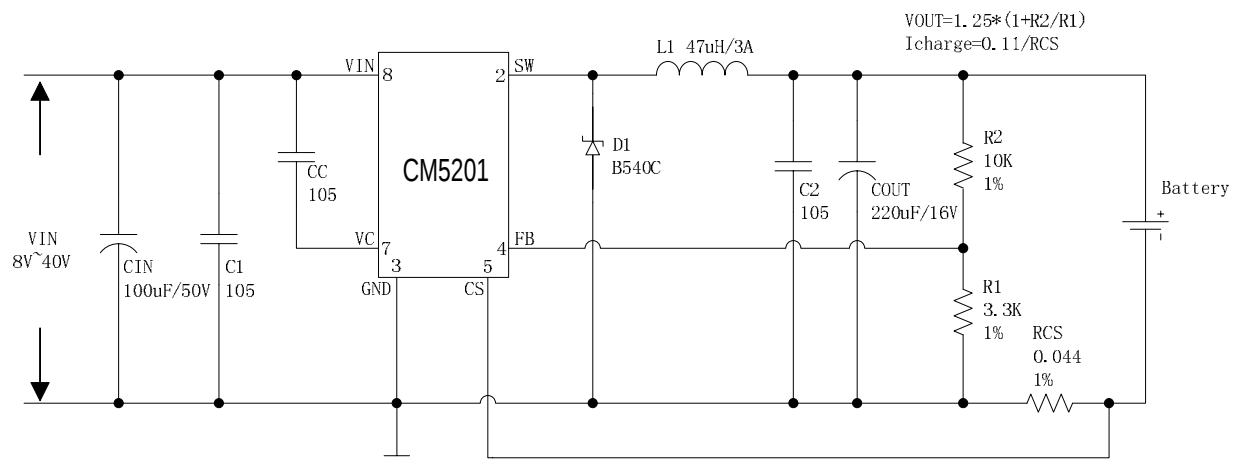


Figure4. CM5201 Typical Application Circuit (Li Battery Charger)

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Typical System Circuit(Buck LED Constant Current Driver)

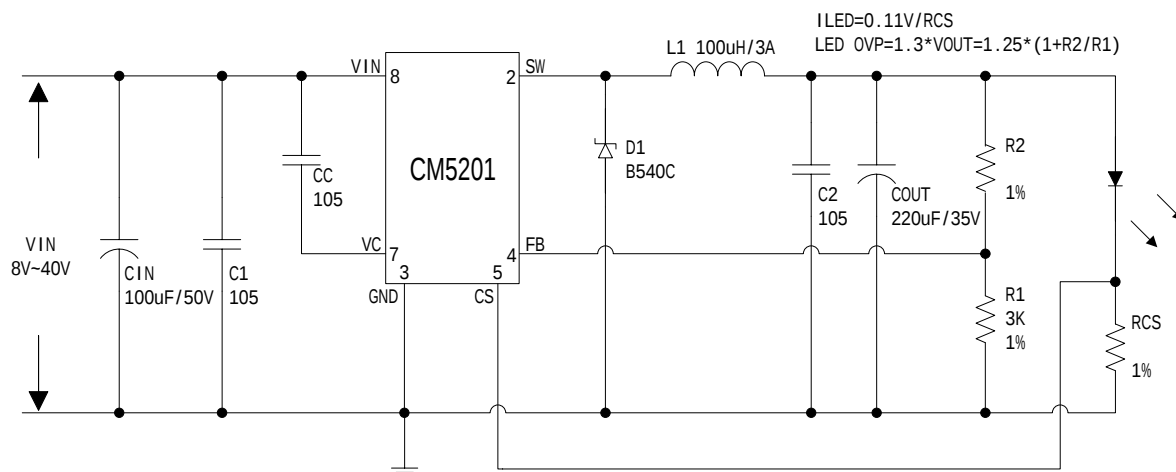


Figure5. CM5201 Typical Application Circuit(LED Constant Current Driver)

Ordering Information

Order Information	Marking ID	Package Type	Packing Type Supplied As
CM5201E1	CM5201E1	SOP8-EP	2500 Units on Tape & Reel

XLSEMI Pb-free products, as designated with “E1” suffix in the par number, are RoHS compliant.

Absolute Maximum Ratings (Note1)

Parameter	Symbol	Value	Unit
Input Voltage	V _{IN}	-0.3 to 45	V
FB Pin Voltage	V _{FB}	-0.3 to V _{IN}	V
SW Pin Voltage	V _{SW}	-0.3 to V _{IN}	V
Power Dissipation	P _D	Internally limited	mW
Thermal Resistance (Junction to Ambient, No Heatsink, Free Air)	R _{JA}	60	°C/W
Maximum Junction Temperature	T _J	-40 to 150	°C
Operating Junction Temperature	T _J	-40 to 125	°C
Storage Temperature	T _{STG}	-65 to 150	°C
Lead Temperature (Soldering, 10 sec)	T _{LEAD}	260	°C
ESD (HBM)		>2000	V

Note1: Stresses greater than those listed under Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

3A 165KHz 40V Buck DC/DC Converter Wither Constant Current Loop

XL4201 Electrical Characteristics

$T_a = 25^\circ\text{C}$; unless otherwise specified.

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
System parameters test circuit figure4						
VFB	Feedback Voltage	$V_{in} = 8\text{V to } 40\text{V}, V_{out}=5\text{V}$ $I_{load}=0.2\text{A to } 2\text{A}$	1.231	1.25	1.269	V
Efficiency	η	$V_{in}=12\text{V}, V_{out}=5\text{V}$ $I_{out}=2.4\text{A}$	-	89	-	%

Electrical Characteristics (DC Parameters)

$V_{in} = 12\text{V}$, $GND=0\text{V}$, V_{in} & GND parallel connect a 100uF/50V capacitor; $I_{out}=500\text{mA}$, $T_a = 25^\circ\text{C}$; the others floating unless otherwise specified.

Parameters	Symbol	Test Condition	Min.	Typ.	Max.	Unit
VIN operation voltage	V_{in}		8		40	V
VIN UVLO	V_{uvlo}			5		V
VIN OVP	V_{ovp}			45		V
Quiescent Supply Current	I_q	$V_{FB} = V_{in}$		2	5	mA
Oscillator Frequency	F_{osc}		127	165	172	KHz
Switch Current Limit	I_L	$V_{FB} = 0$		3.5		A
Output Power PMOS	R_{dson}	$V_{FB}=0\text{V}, V_{in}=12\text{V},$ $I_{SW}=3\text{A}$		75	100	mohm
Constant current sense Voltage	V_{CS}		104.5	110	115.5	mV

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Typical System Application (Car Charger)

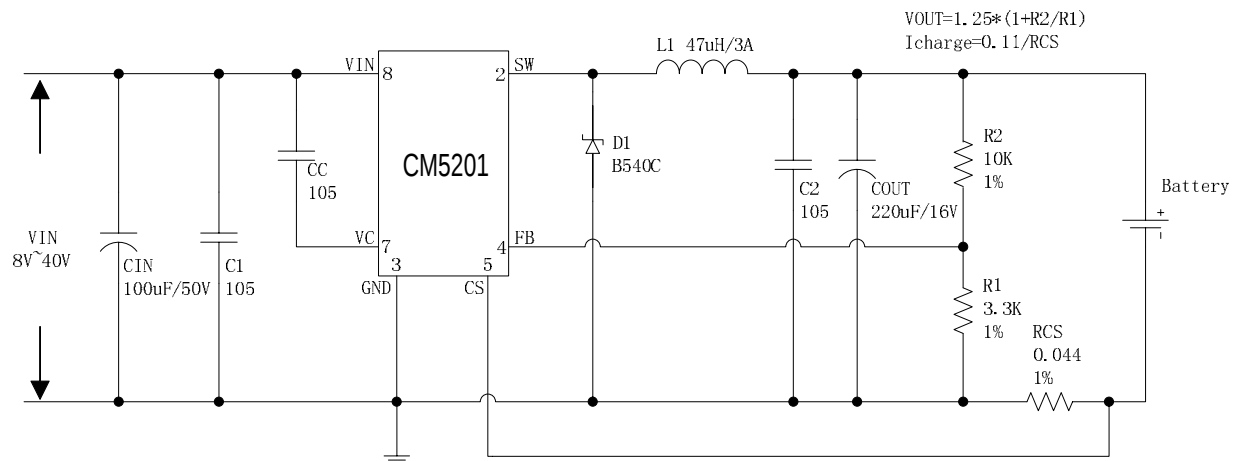


Figure6. CM5201 System Parameters TestCircuit (VIN=8V~40V, VOUT=5V/0.1A~2.5A)

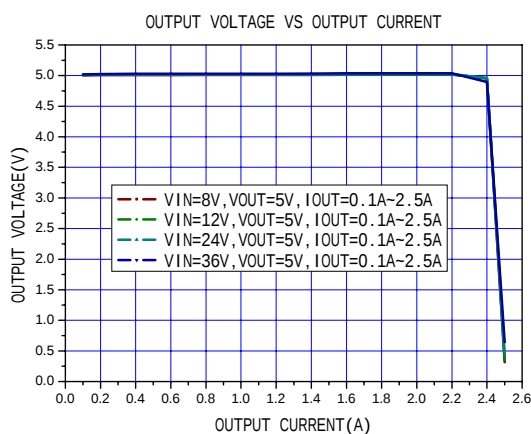


Figure7. Output Constant Current Curve

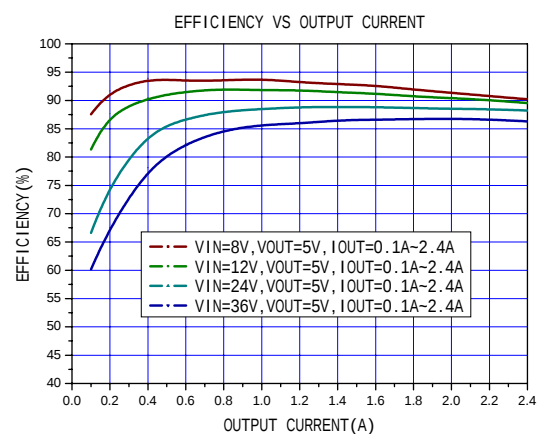


Figure8. Efficiency Curve

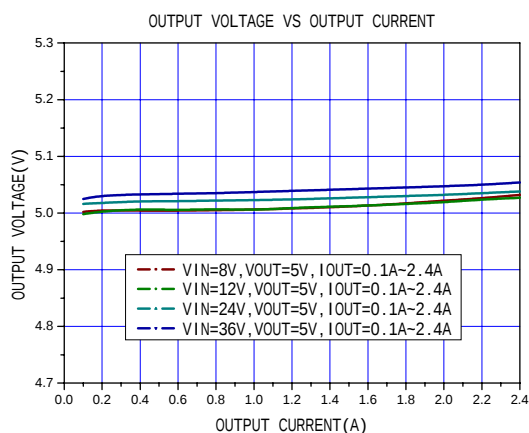


Figure9. Line&Load regulation Curve


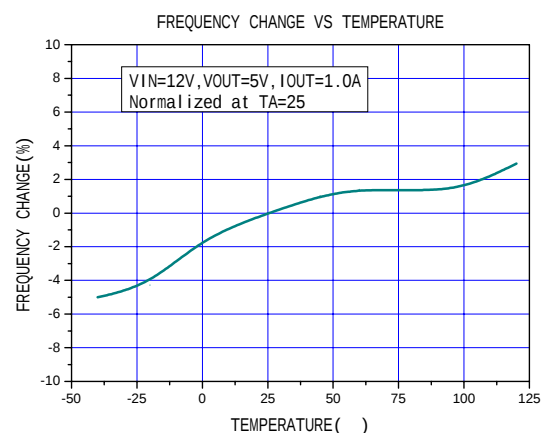


Figure10. Frequency change Curve

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

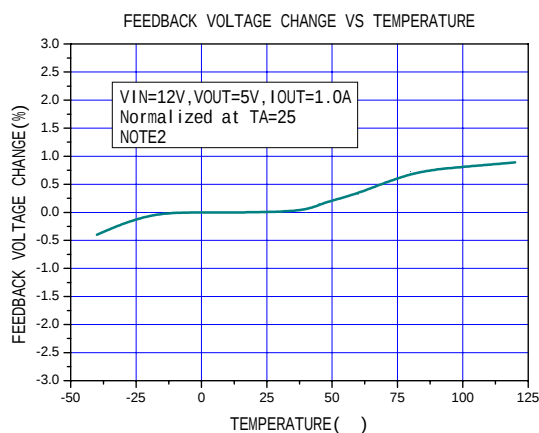

Note2: Internal temperature compensation circuitry is provided to compensation the PCB and external line loss in system application. When the junction temperature or the output power rise, the feedback voltage will be compensated. This function is provided to compensation the PCB and external line loss in system application.

Figure11. Feedback voltage change Curve

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Typical System Application (Recommend output voltage safe work range in LED application)

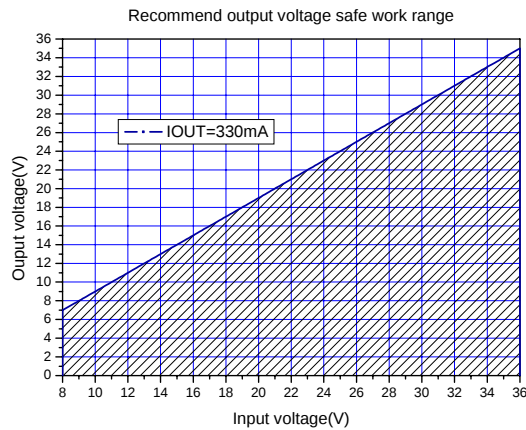


Figure12.Max output voltage(IOUT=330mA)

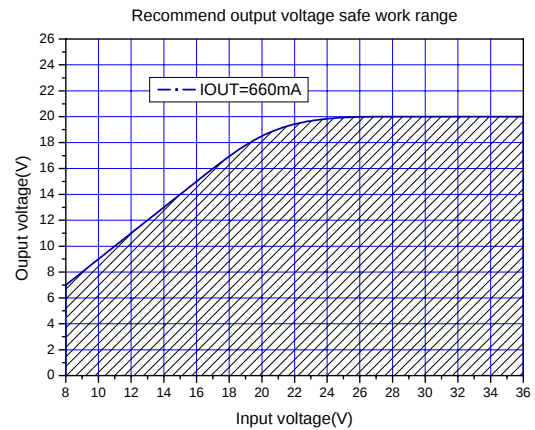


Figure13.Max output voltage(IOUT=660mA)

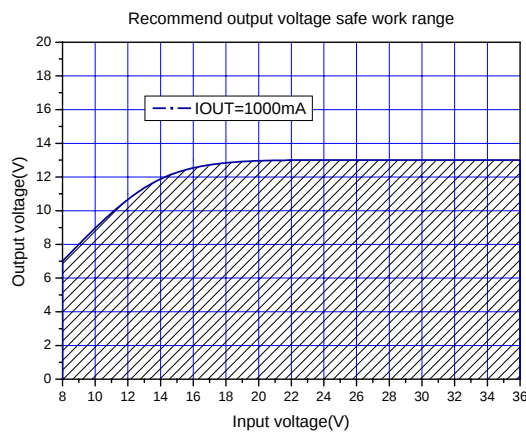


Figure14.Max output voltage(IOUT=1000mA)

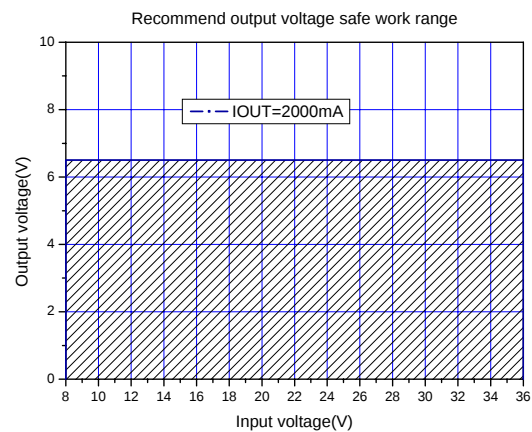


Figure15.Max output voltage(IOUT=2000mA)

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Typical System Circuit(VIN=8V~36V,IOUT=330mA)

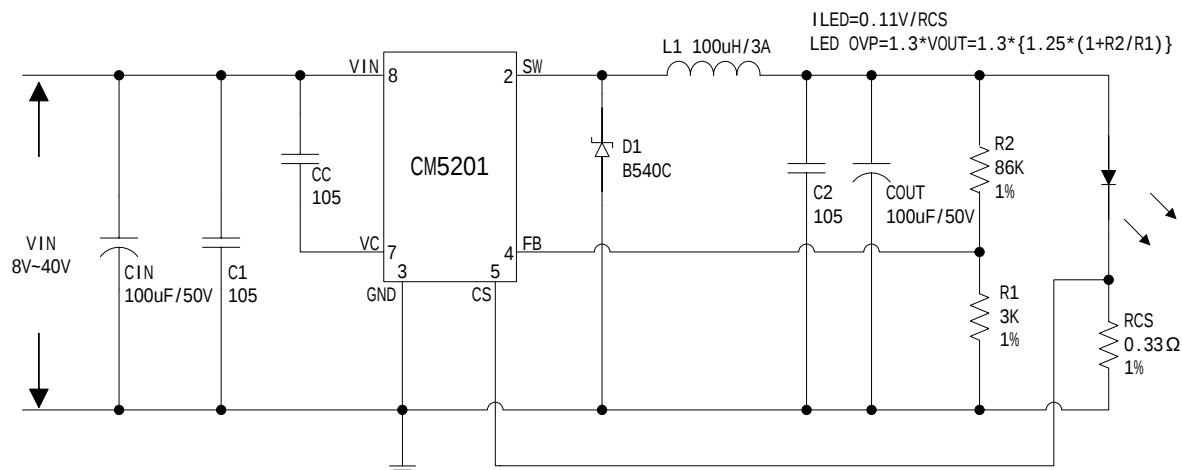


Figure16. CM5201 System Parameters Test Circuit (VIN=8V~40V,IOUT=330mA)

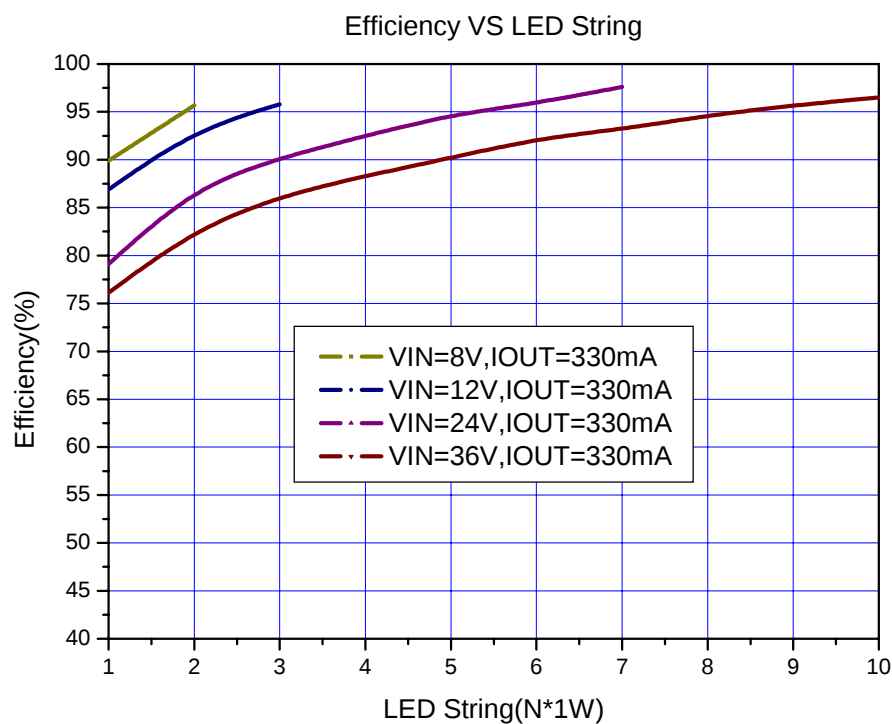


Figure17. CM5201 System Efficiency Curve (VIN=8V~40V,IOUT=330mA)

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Typical System Circuit(VIN=8V~40V,IOUT=660mA)

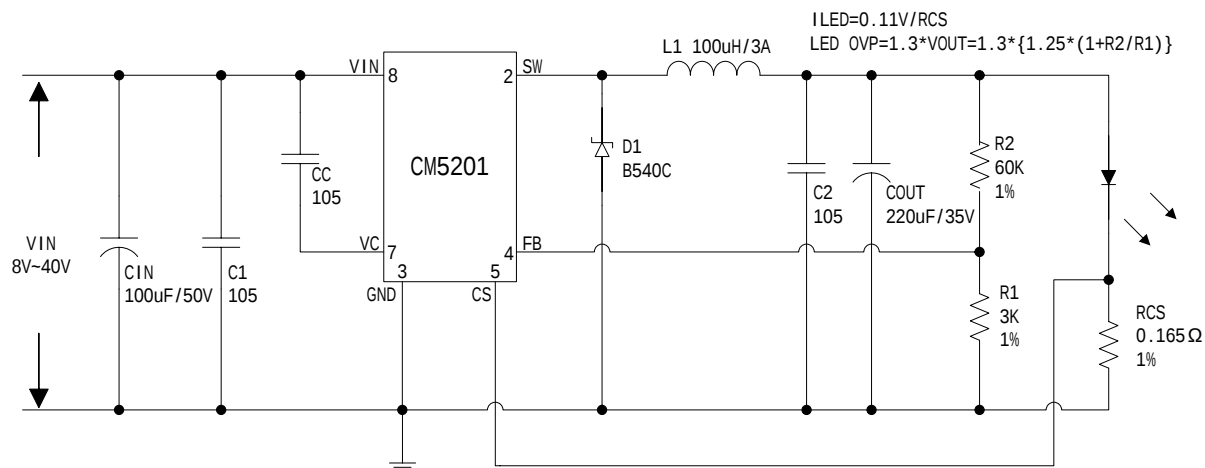


Figure18. CM5201 System Parameters Test Circuit (VIN=8V~40V,IOUT=660mA)


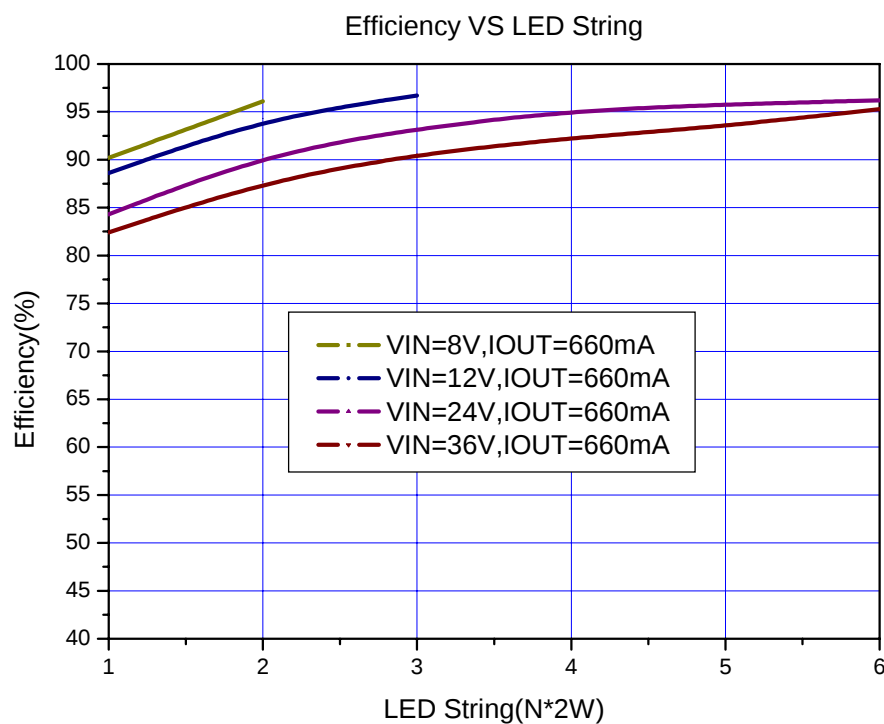


Figure19. CM5201 System Efficiency Curve (VIN=8V~40V,IOUT=660mA)

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Typical System Circuit(VIN=8V~40V,IOUT=1000mA)

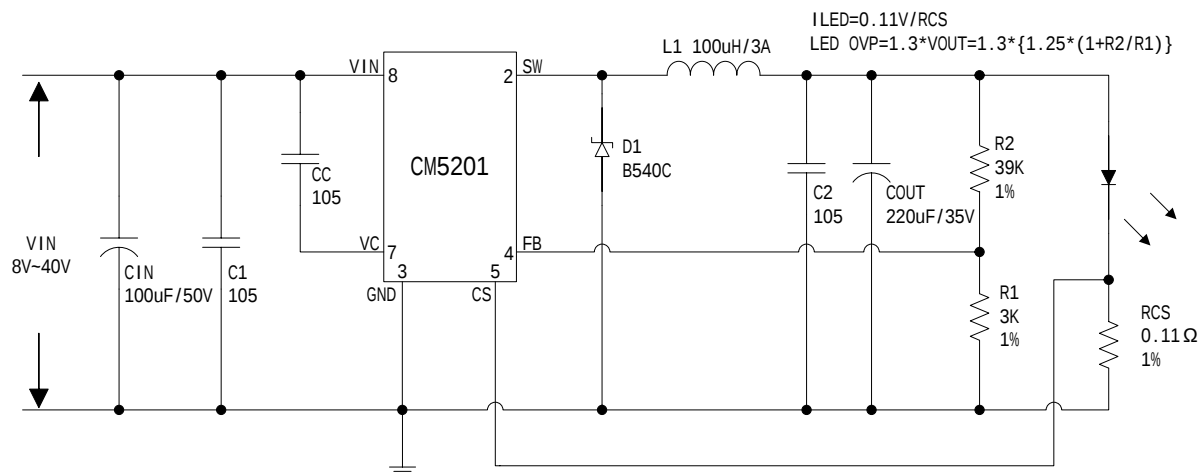

Test Circuit (VIN=8V~40V,IOUT=1000mA)

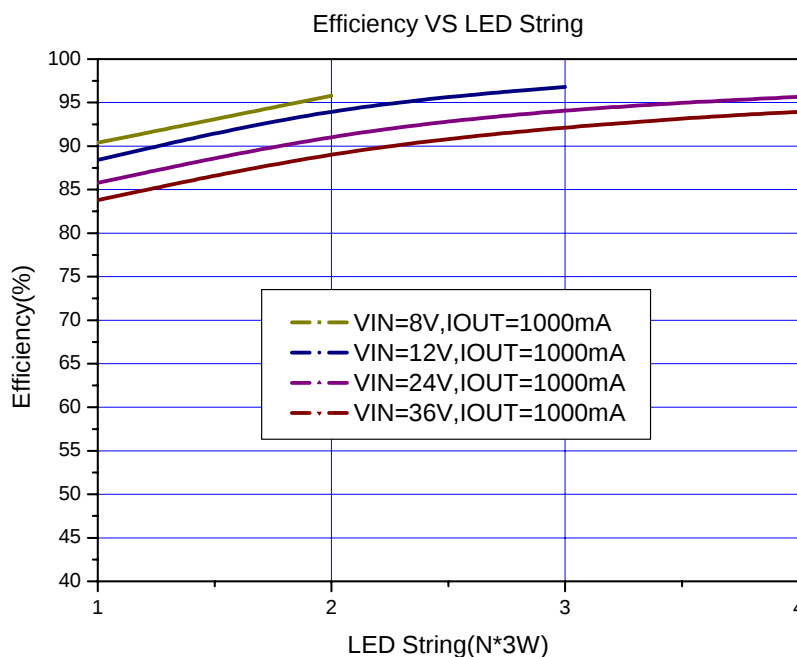


Figure21. CM5201 System Efficiency Curve (VIN=8V~40V,IOUT=1000mA)

3A 165KHz 40V Buck DC/DC Converter Wither Constant Current Loop

Typical System Circuit(PWM Dimming)

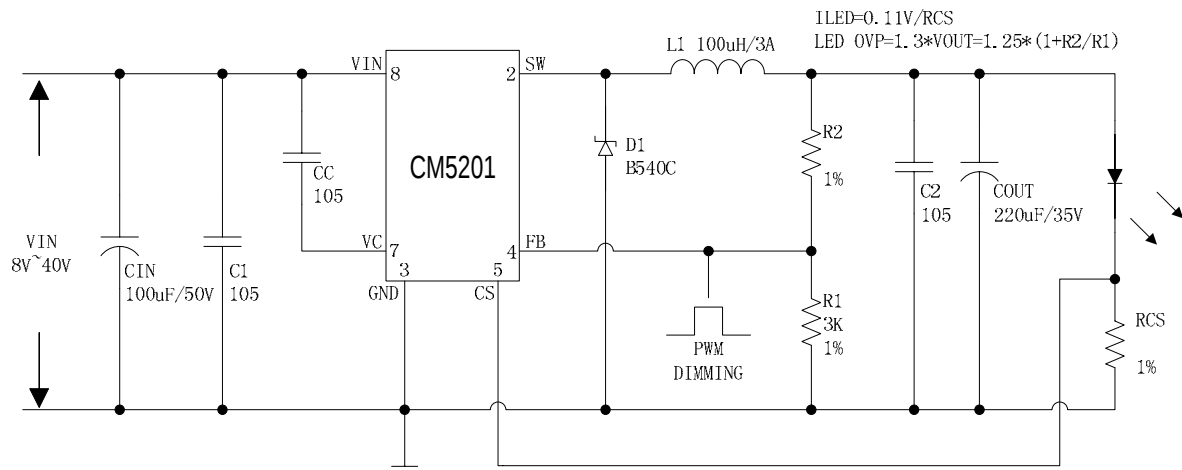



Figure22. CM5201 System Parameters Test Circuit

Schottky Diode Selection Table

Current	Surface Mount	Through Hole	VR (The same as system maximum input voltage)				
			20V	30V	40V	50V	60V
1A		√	1N5817	1N5818	1N5819		
3A		√	1N5820	1N5821	1N5822		
		√	MBR320	MBR330	MBR340	MBR350	MBR360
	√		SK32	SK33	SK34	SK35	SK36
	√			30WQ03	30WQ04	30WQ05	
		√		31DQ03	31DQ04	31DQ05	
		√	SR302	SR303	SR304	SR305	SR306
5A		√	1N5823	1N5824	1N5825		
		√	SR502	SR503	SR504	SR505	SR506
		√	SB520	SB530	SB540	SB550	SB560
	√		SK52	SK53	SK54	SK55	SK56
	√			50WQ03	50WQ04	50WQ05	

3A 165KHz 40V Buck DC/DC Converter With Constant Current Loop

Package Information (SOP8-EP)

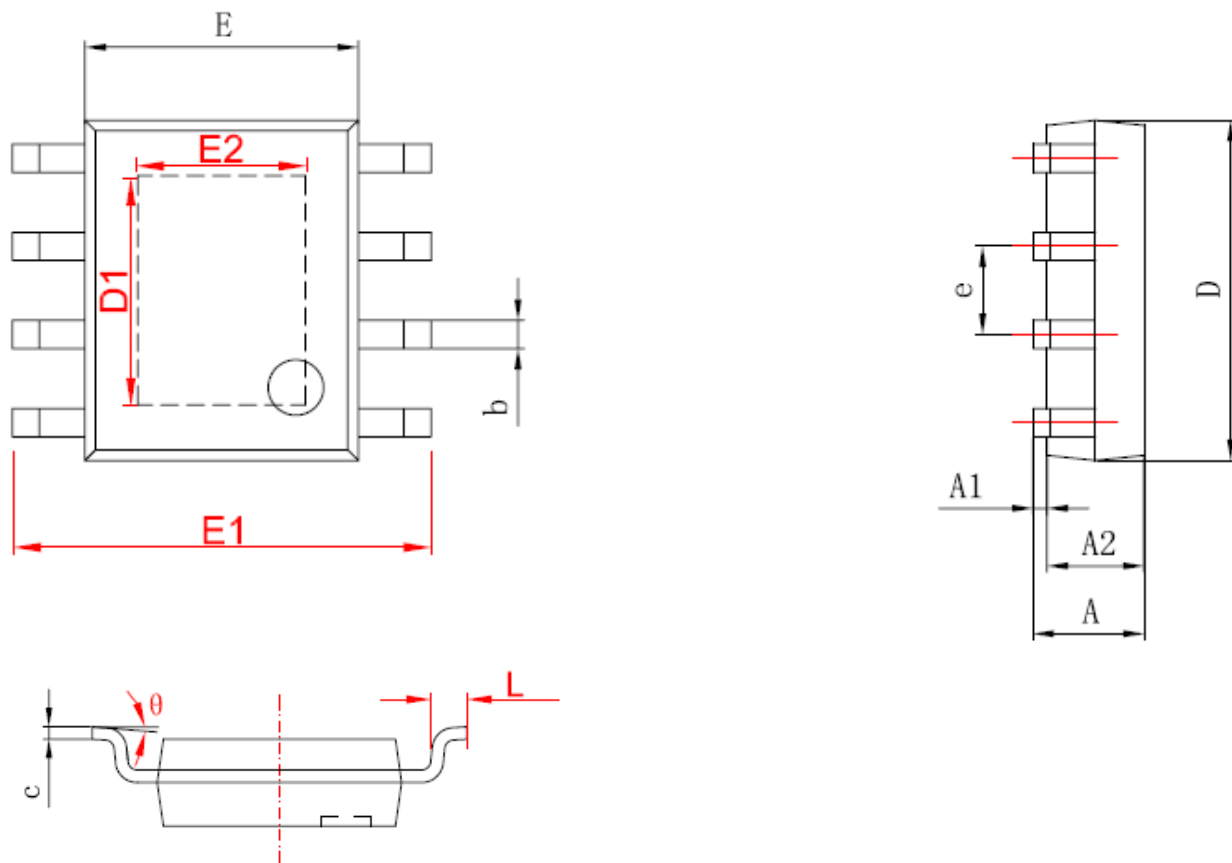

字符	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.350	1.750	0.053	0.069
A1	0.050	0.150	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
D1	3.202	3.402	0.126	0.134
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
E2	2.313	2.513	0.091	0.099
e	1.270 (BSC)		0.050 (BSC)	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°