
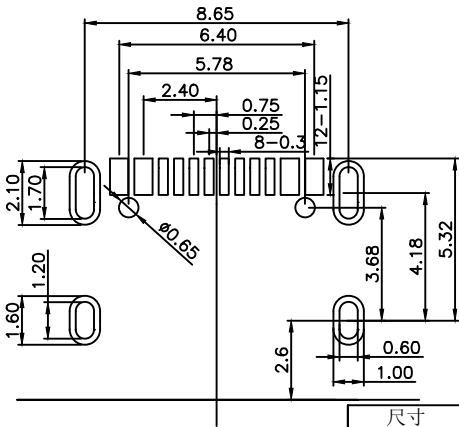
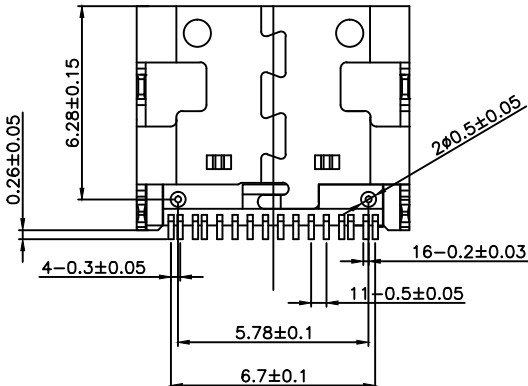
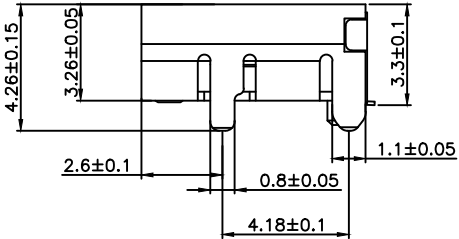
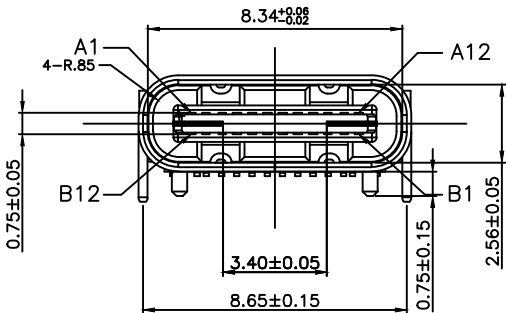


联系人：陈先生13828992738 QQ3091784316

变更单号	版本	日期	内容描述	变更	审核	批准
——	A/0			——	——	——



规格:

1. 插入力: 20N MAX.
2. 拔出力: 8~20N
3. 耐久性: 10000 CYCLES MIN.
4. 额定电流: 0.5A
5. 额定电压: 40V MAX
6. 耐电压: 250V AC
7. 接触阻抗: 40mΩ MAX.
8. 绝缘电阻: 100MΩ MIN (UNMATED)
10MΩ MIN (MATED)
9. 工作温度: -55℃ TO +85℃
10. 所用材质须符合RoHS要求

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

尺寸	角度
.0 ±0.3	0° ±2.0°
.00 ±0.2	.0° ±1.0°
.000 ±0.1	.00° ±0.5°
未注公差	

						品 名:	USB-3.1-C		
						料 号:	33000778		
客户名称:			客户编码:						
比例	1:8	单位	mm		页码	1 OF 1	A4		